


Thin Circular Quartz Cell

MQQST011 | Features and requirements to define

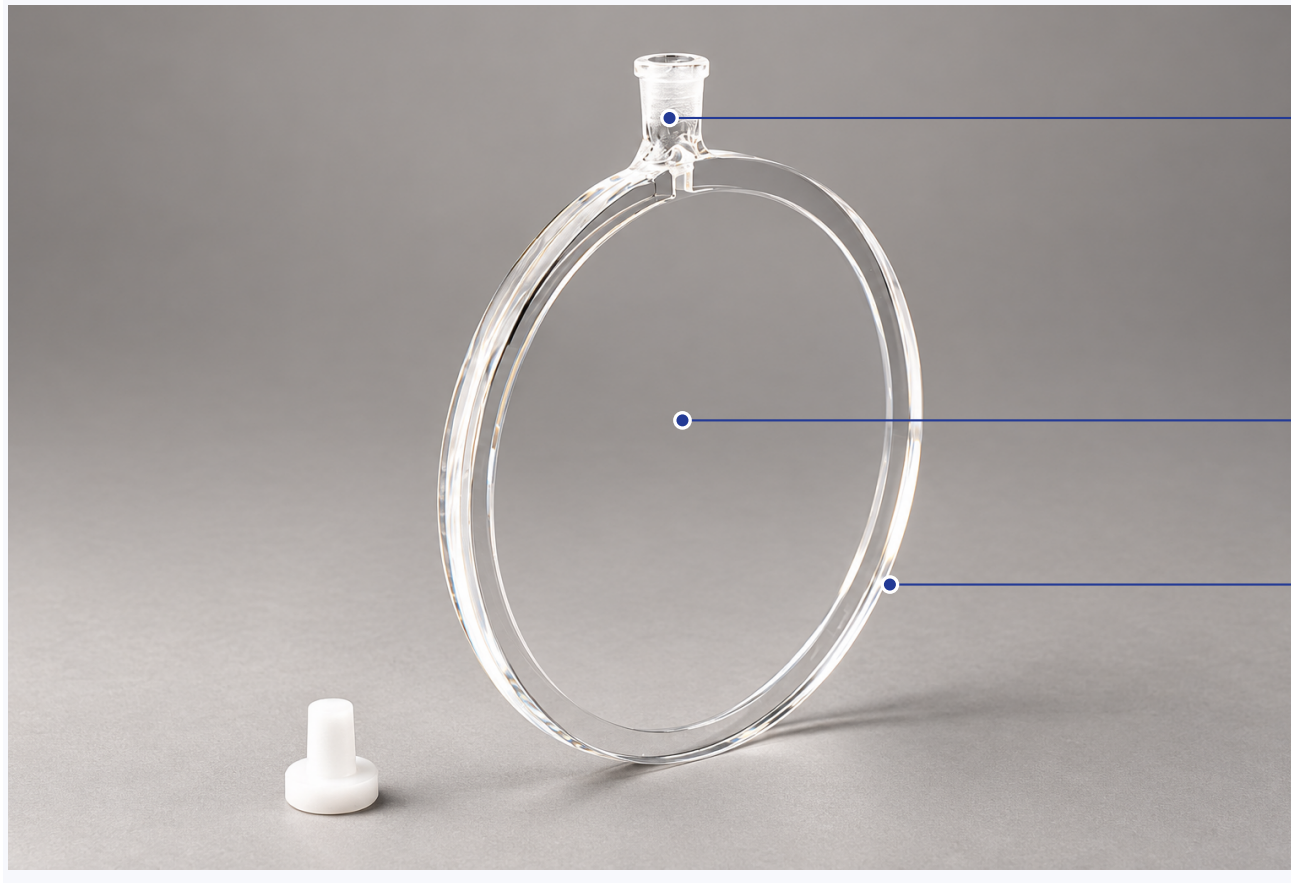

1 Stopper-neck access

Allow access to the filling neck and stopper.

2 Circular optical region

Define the usable circular optical area.

3 Thin sample gap

Confirm the thin sample gap on the drawing.

REFERENCE VALUES

Nominal path

1 mm

Reference outer diameter

57 mm

Illustrative design example; not an actual customer requirement.

Not to scale. Product-reference rendering with annotations; use the agreed drawing for dimensional acceptance.