


Quartz Cuvette with an Offset Hole

MQQCU003 | Features and requirements to define

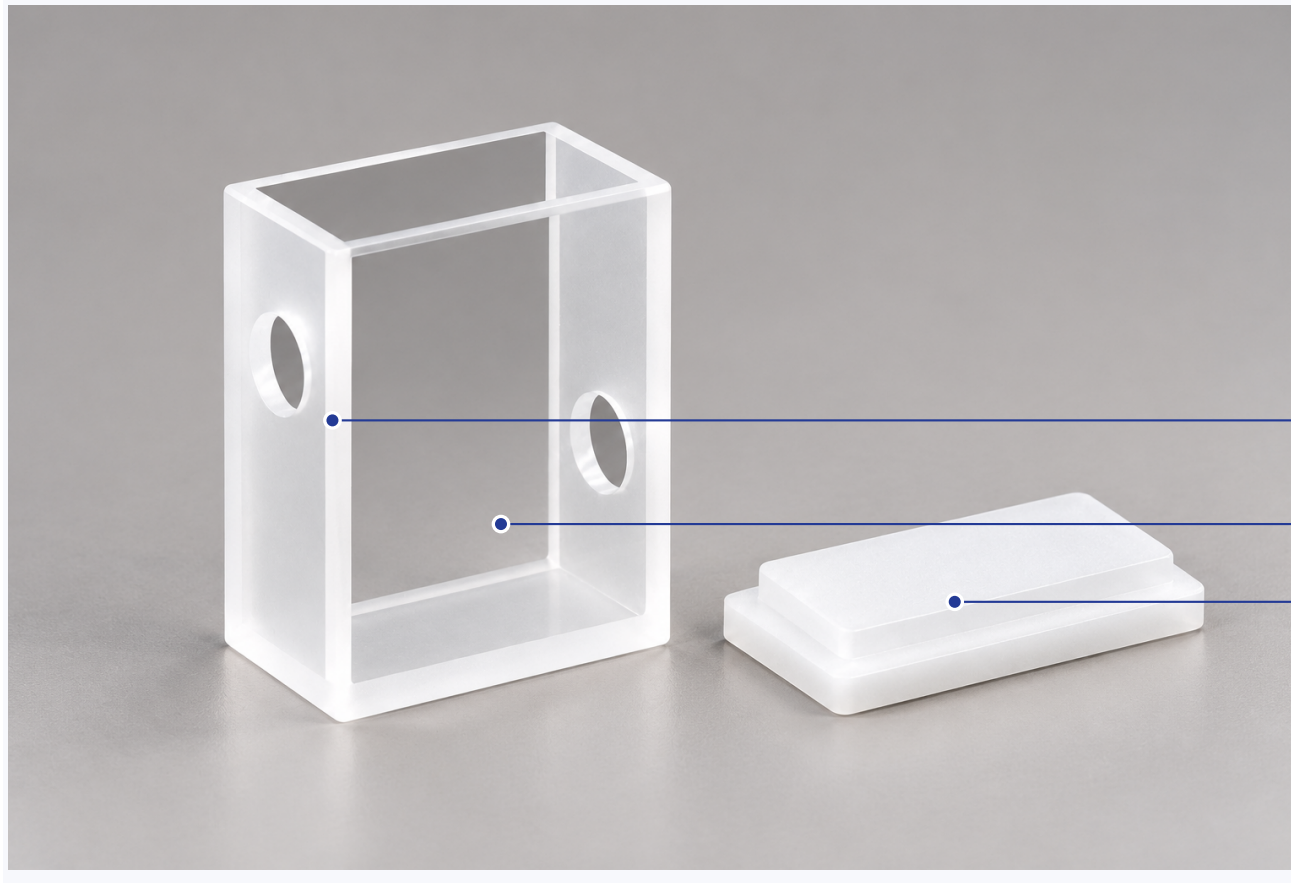

1 Opposed aperture axis

Locate both apertures from agreed references.

2 Optical-region datum

Keep the required optical region separate.

3 Separate lid

Specify the separate lid and its contact geometry.

REFERENCE VALUES

Nominal path

10 mm

Illustrative design example; not an actual customer requirement.

Not to scale. Product-reference rendering with annotations; use the agreed drawing for dimensional acceptance.